

PRESENTATION

GLG, is a company established in Barcelona in 1963. At that time their founders had already a great experience in the manufacturing of cutting tools. During the period of 1963/1973 **GLG** manufactured all types of cutting tools and their sales were exclusively destinated to the domestic market.

Since 1973 we specialised in the manufacturing of circular sawblades and started to export to the majority of the European countries.



Since 1989 and because of continuous investments in machinery, we more diversified our sales and expanded to the rest of the continents keeping actually these dynamics and being our trademark wellknown on all these markets.

With the edition of this catalogue we pretend to facilitate the most complete information to support our **CUSTOMERS** and **COLLABORATORS**.

■ PRESENTATION

Our constant dedication to investigate the needs of the market made us develop new cutting geometries and to offer the newest surface treatments (TiN, TiCN, TinAl, TinCr) as well as the traditional **ANTIFRIC** and **NITROVAP**.



Our manufacturing process starts with:


- Raw material reception and control according to **OUR** standards.
- Perfect application of heat treatment and metallographic control.
- Manufacturing with most modern **CNC** machinery.
- Final control of all sawblades leaving our factory.

As consequence to above **THE QUALITY** and **HIGH PERFORMANCE** of the product guarantees the great **RELIABILITY** of our **SAWBLADES**.




■ PRODUCTION RANGE

■ DIN SAWBLADES AND SPECIAL

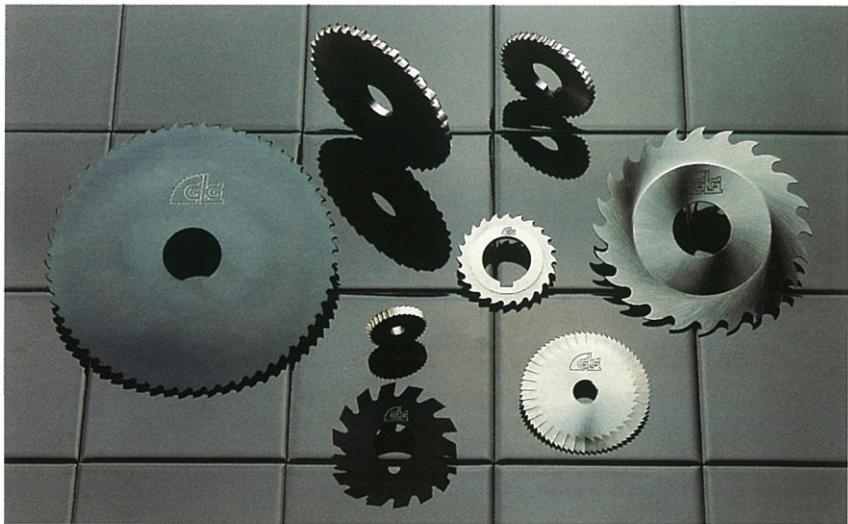


■ SAWBLADES FOR CUT OFF MACHINES

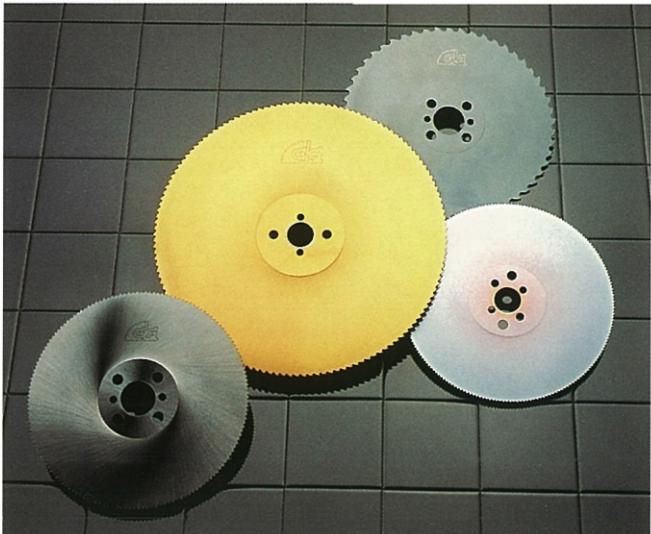

■ SAWBLADES SOLID CARBIDE K10




■ BANDSAWS

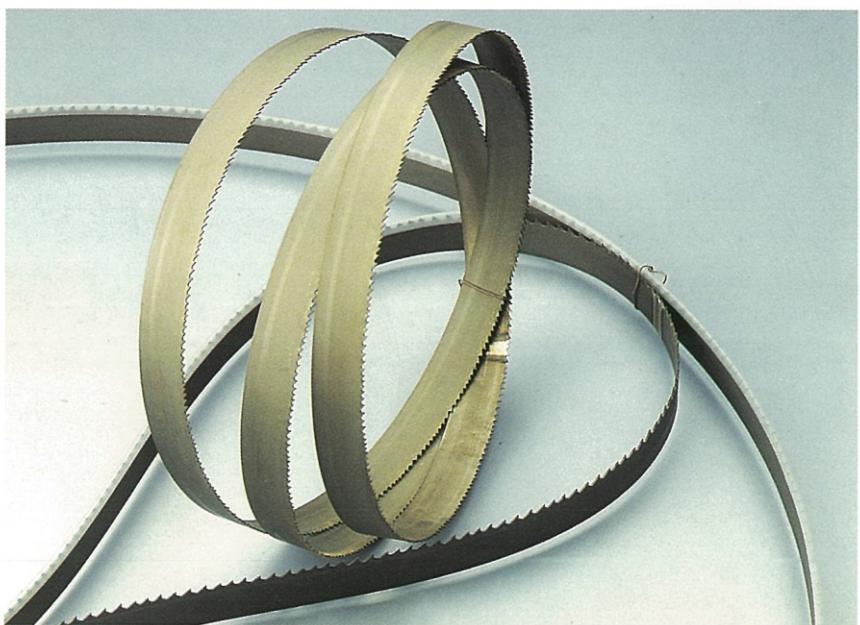

■ ■ ■

CIRCULAR SAWBLADES DIN AND CUT OFF

■ ■ ■

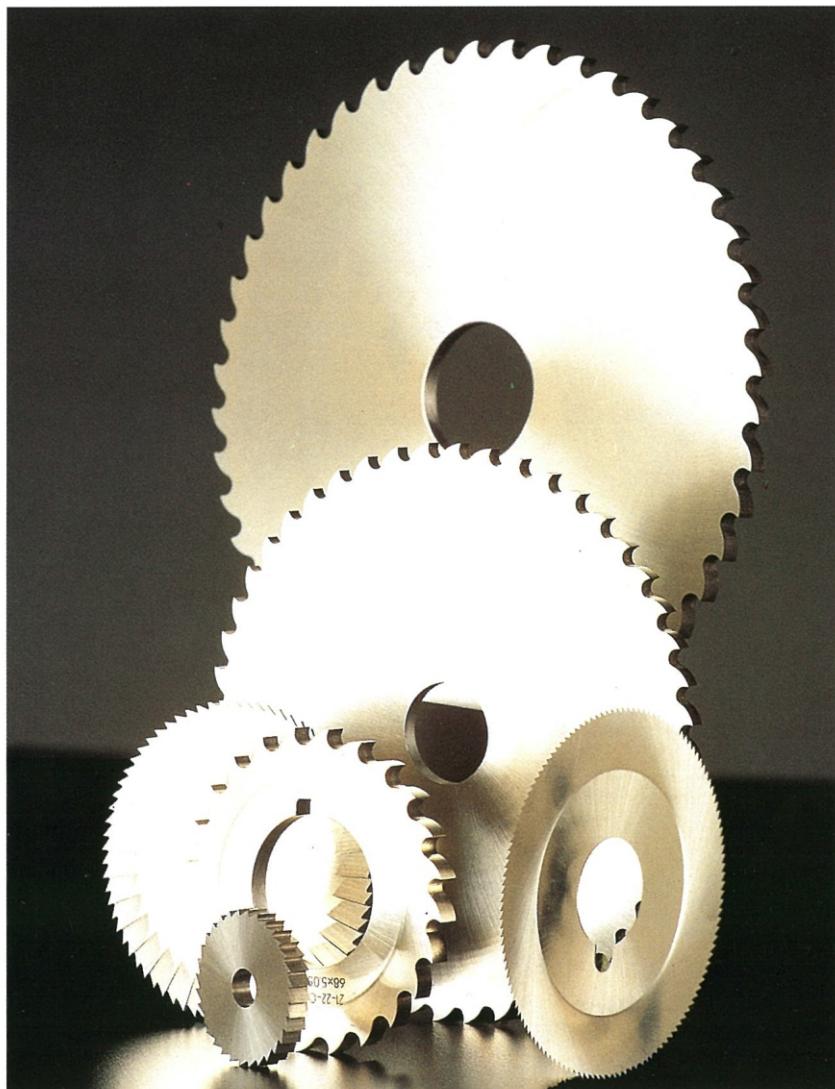

■ ■ ■

HSS - DMo5

HSS/E - EMo5 Co5

SOLID CARBIDE

■ ■ ■

■ STEEL QUALITIES

■ HSS • M2 • DMo5 • DIN 1.3343

COMPOSITION: 0,9 • C 4,2 Cr • 5 Mo • 6,4 W • 1,8 V

This is a Wolfram - molybdenum high steel. These elements confer the steel very high technical characteristics maintaining an excellent tenacity.

The molybdenum confers the property of reducing the fragility permitting the formation of a very fine martensitic grain, increasing as well the limit of elasticity, which allows a great cutting performance. The Wolfram is an excellent former of very hard carbides, giving the sawblades great tenacity and sensible strength and higt temperature resistance improving the cutting capacity. The Vanadium contributes to the formation of hard carbides that improve the wear out resistance.

■ HSSE • M35 • EMo5 Co 5 • DIN 13243

COMPOSITION: 0,93 C • 4,2 Cr • 5 Mo • 6,4 W • 5 Co • 2 V

This is a Wolfram - molybdenum - cobalt high speed steel. The difference to **HSS-DMo5** is the contents of 5% cobalt.

The cobalt contributes to give a good cutting tenacity and long lifetime, especially when used in high temperatures.

These characteristics are important, as they permit to recommend this steel to cut **INOX** and materials of high mechanic resistance that during the cutting process produce high temperature in the contact area.

■ K 10 SOLID CARBIDE

The carbide used for the manufacturing of sawblades is **K 10** and we manufacture up to diameter 160. These blades are used to cut difficult materials or as well to increase the tool's lifetime.




It is very important to work in machines without vibrations in order to assure a rigid clamping of blade and material.

The combination of carbide and surface treatments **TiN, TiCN** is actually the best combination of getting the best heat and wear resistance.





TOOTHFORMS CLEARANCE AND TOLERANCES DIN-1840

| DENOMINATION | ILLUSTRATION | ABV. | Cutting angle γ for type of tooling | | | USE OF SAWS ACCORDING TO |
|--------------------------------------|--------------|------|--|--------------------|--------------------|--|
| | | | N $\pm 2^\circ$ | H $\pm 2^\circ$ | W $\pm 2^\circ$ | |
| Straight tooth (fine) | | A | 5° | 0° | 10° | DIN 1837 Standard execution |
| Straight tooth with alternated bevel | | AW | | | | DIN 1837 Special execution |
| Hooked tooth (coarse) | | B | | | | DIN 1838 Standard execution |
| Hooked tooth with alternated bevel | | Bw | 15° | 8° | 25° | DIN 1837 for t ≥ 3,15 mm. and b ≥ 2 mm. Special execution |
| High performance tooth (Heller) | | C | | | | DIN 1837 for t ≥ 3,15 mm. and b ≥ 2 mm. Special execution |
| | | | | | | DIN 1838 for b ≥ 2 mm. Special execution |

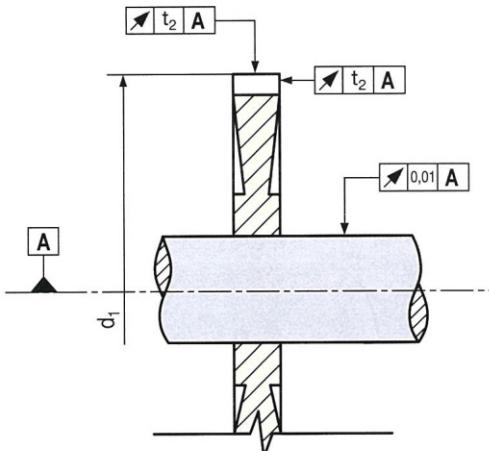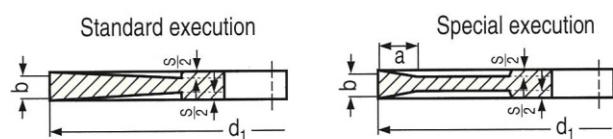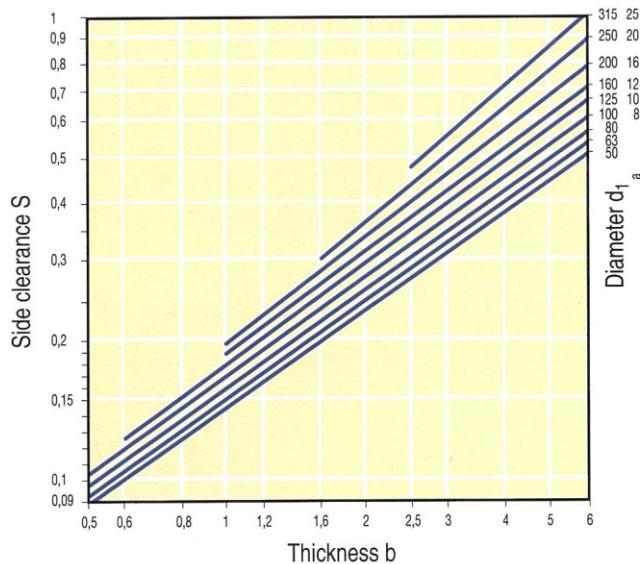

| d_1 mm. | t_1 mm. | t_2 mm. |
|-----------|-----------|-----------|
| < | 40 | 0,1 |
| 40 | 100 | 0,16 |
| 100 | 200 | 0,25 |
| 200 | 315 | 0,4 |

■ SELECTION OF TOOTHFORM

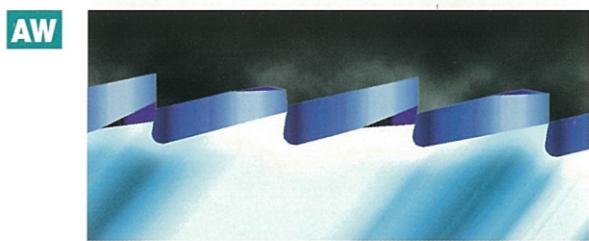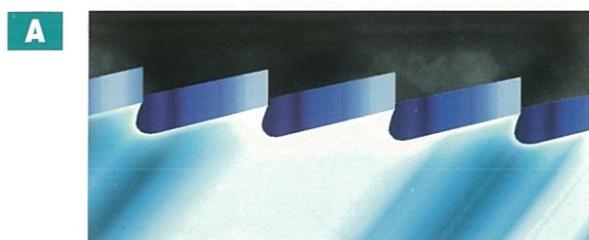

DIN 1837

A - FINE TOOTH
AW - TOOTH WITH ALTERNATED BEVELS

The toothform **A** and **AW** are mainly used for works of fine mechanizing and jewellery with short chipping. The tooth pitches are from 0,8 to 6,3 mm. according to external diameter and thickness and are used for minor cutting depths, generally from 3 to 5 mm.

Form **AW** has the same characteristics, but producing smaller chips.




DIN 1838 • DIN 1838 (ACME)

B - GROSS TOOTH
BW - TOOTH WITH ALTERNATED BEVELS

Form **B** is conceived for pressing deep slots in long chipping materials. Its geometry is adequate to facilitate the formation and storage of chips. It is recommended for slots superior to 5 mm.

Form **BW** is adequate for cut off machines with profile cut up to 3-4 mm., although in small blades this toothform also serves to slit thicknesses superior, obtains the reduction of the cutting strength.

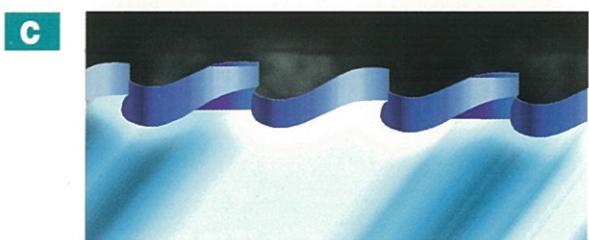

DIN 1838 (HZ)

C - PRECUTTER TOOTH WITH BEVELS SIDES AND FINISHING TOOTH WITHOUT BEVELS

The effect of this toothform is to reduce the necessary efforts of mechanizing a working piece. The precutter tooth is 0,15 +/- 0,3 mm. higher than the finishing tooth, with side bevels, cutting the precutter only 1/3 in the center of the sawblade's thickness and the finishing tooth the resting 2/3 on the sides.



BR - FORM B WITH CHIPBREAKER

The latest novelty in relation to toothform. Especially indicated to cut tubes. The chipbreaker is a fine slot of 0,4 mm. on top of the tooth. It obtains 25% more rentability than form **BW**.

DIN-1837 STANDARD • DIN-1838 STANDARD**DIN-1837 STANDARD**

| OUTER DIAMETER | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 |
|----------------|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| HOLE | 5 | 8 | 8 | 10 | 13 | 16 | 22 | 22 | 22 | 22 | 32 | 32 | 40 |
| HUB | 10 | 14 | 14 | 18 | 25 | 32 | 36 | 40 | 40 | 40 | 63 | 63 | 80 |

t = pitch z = tooth number

| THICKNESS | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z |
|-----------|------|----|------|----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|
| 0,2 | 0,8 | 80 | 1 | 80 | 1 | 100 | 1 | 128 | 1,25 | 128 | | | | | | | | | | |
| 0,25 | 1 | 64 | 1 | 80 | 1 | 100 | 1,25 | 100 | 1,25 | 128 | 1,25 | 160 | | | | | | | | |
| 0,3 | 1 | 64 | 1 | 80 | 1,25 | 80 | 1,25 | 100 | 1,25 | 128 | 1,6 | 128 | 1,6 | 160 | | | | | | |
| 0,4 | 1 | 64 | 1,25 | 64 | 1,25 | 80 | 1,25 | 100 | 1,6 | 100 | 1,6 | 128 | 1,6 | 160 | | | | | | |
| 0,5 | 1,25 | 48 | 1,25 | 64 | 1,25 | 80 | 1,6 | 80 | 1,6 | 100 | 1,6 | 128 | 2 | 128 | 2 | 160 | | | | |
| 0,6 | 1,25 | 48 | 1,25 | 64 | 1,6 | 64 | 1,6 | 80 | 1,6 | 100 | 2 | 100 | 2 | 128 | 2 | 160 | 2,5 | 160 | | |
| 0,8 | 1,25 | 48 | 1,6 | 48 | 1,6 | 64 | 1,6 | 80 | 2 | 80 | 2 | 100 | 2 | 128 | 2,5 | 128 | 2,5 | 160 | | |
| 1 | 1,6 | 40 | 1,6 | 48 | 1,6 | 64 | 2 | 64 | 2 | 80 | 2 | 100 | 2,5 | 100 | 2,5 | 128 | 2,5 | 160 | 3,15 | 200 |
| 1,2 | 1,6 | 40 | 1,6 | 48 | 2 | 48 | 2 | 64 | 2 | 80 | 2,5 | 80 | 2,5 | 100 | 2,5 | 128 | 3,15 | 128 | 3,15 | 200 |
| 1,6 | 1,6 | 40 | 2 | 40 | 2 | 48 | 2 | 64 | 2,5 | 64 | 2,5 | 80 | 2,5 | 100 | 3,15 | 100 | 3,15 | 128 | 3,15 | 160 |
| 2 | 2 | 32 | 2 | 40 | 2 | 48 | 2,5 | 48 | 2,5 | 64 | 2,5 | 80 | 3,15 | 80 | 3,15 | 100 | 3,15 | 128 | 4 | 128 |
| 2,5 | 2 | 32 | 2 | 40 | 2,5 | 40 | 2,5 | 48 | 2,5 | 64 | 3,15 | 64 | 3,15 | 80 | 3,15 | 100 | 4 | 100 | 4 | 128 |
| 3 | 2 | 32 | 2,5 | 32 | 2,5 | 40 | 2,5 | 48 | 3,15 | 48 | 3,15 | 64 | 3,15 | 80 | 4 | 80 | 4 | 100 | 4 | 128 |
| 4 | 2,5 | 24 | 2,5 | 32 | 2,5 | 40 | 3,15 | 40 | 3,15 | 48 | 3,15 | 64 | 4 | 64 | 4 | 80 | 4 | 100 | 5 | 128 |
| 5 | 2,5 | 24 | 2,5 | 32 | 3 | 32 | 3,15 | 40 | 3,15 | 48 | 4 | 48 | 4 | 64 | 4 | 80 | 5 | 100 | 5 | 128 |
| 6 | 2,5 | 24 | 3,15 | 24 | 3 | 32 | 3,15 | 40 | 4 | 40 | 4 | 48 | 4 | 64 | 5 | 64 | 5 | 80 | 5 | 100 |

t = pitch z = tooth number

| OUTER DIAMETER | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 |
|----------------|----|----|----|-----|-----|-----|-----|-----|-----|
| HOLE | 13 | 16 | 22 | 22 | 22 | 22 | 32 | 32 | 40 |
| HUB | 25 | 32 | 36 | 40 | 40 | 40 | 63 | 63 | 80 |

| THICKNESS | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z | t | z |
|-----------|------|----|------|----|-----|----|-----|----|-----|----|-----|----|------|-----|------|-----|------|-----|---|---|
| 0,5 | 3,15 | 48 | 3,15 | 64 | | | | | | | | | | | | | | | | |
| 0,6 | 3,15 | 48 | 4 | 48 | 4 | 64 | 4 | 80 | | | | | | | | | | | | |
| 0,8 | 4 | 40 | 4 | 48 | 4 | 64 | 5 | 64 | 5 | 80 | | | | | | | | | | |
| 1 | 4 | 40 | 4 | 48 | 5 | 48 | 5 | 64 | 5 | 80 | 6,3 | 80 | | | | | | | | |
| 1,2 | 4 | 40 | 5 | 40 | 5 | 48 | 5 | 64 | 6,3 | 64 | 6,3 | 80 | 6,3 | 100 | | | | | | |
| 1,6 | 5 | 32 | 5 | 40 | 5 | 48 | 6,3 | 48 | 6,3 | 64 | 6,3 | 80 | 8 | 80 | 8 | 100 | | | | |
| 2 | 5 | 32 | 5 | 40 | 6,3 | 40 | 6,3 | 48 | 6,3 | 64 | 8 | 64 | 8 | 80 | 8 | 100 | | | | |
| 2,5 | 5 | 32 | 6 | 32 | 6,3 | 40 | 6,3 | 48 | 8 | 48 | 8 | 64 | 8 | 80 | 10 | 80 | 10 | 100 | | |
| 3 | 6,3 | 24 | 6 | 32 | 6,3 | 40 | 8 | 40 | 8 | 48 | 8 | 64 | 10 | 64 | 10 | 80 | 10 | 100 | | |
| 4 | 6,3 | 24 | 6,3 | 32 | 8 | 32 | 8 | 40 | 8 | 48 | 10 | 48 | 10 | 64 | 10 | 80 | 12,5 | 80 | | |
| 5 | 6,3 | 24 | 8 | 24 | 8 | 32 | 8 | 40 | 10 | 40 | 10 | 48 | 10 | 64 | 12,5 | 64 | 12,5 | 80 | | |
| 6 | 8 | 20 | 8 | 24 | 8 | 32 | 10 | 32 | 10 | 40 | 10 | 48 | 12,5 | 48 | 12,5 | 64 | 12,5 | 80 | | |

■ SAWs OF SPECIAL EXECUTION

■ 1 - JEWELLERY

| DIMENSIONS | | DIMENSIONS | |
|------------------|-------------|-------------------|-------------|
| 50 x 0,2 x 8/10 | Z = 160/180 | 63 x 0,2 x 10/16 | Z = 180/200 |
| 50 x 0,25 x 8/10 | Z = 160/180 | 63 x 0,25 x 10/16 | Z = 180/200 |
| 50 x 0,30 x 8/10 | Z = 160/180 | 63 x 0,30 x 10/16 | Z = 180/200 |
| 50 x 0,40 x 8/10 | Z = 160/180 | 63 x 0,40 x 10/16 | Z = 180/200 |
| 50 x 0,50 x 8/10 | Z = 160/180 | 63 x 0,50 x 10/16 | Z = 180/200 |

■ 2 - SAWs FOR G.F. MACHINES


(tude cutting). Material HSS y HSS-E = 5% Co.

| DIMENSIONS | BOTON | Z |
|---------------|-------|-------|
| 63 x 1.6 x 16 | 36 | 80 BW |
| 63 x 1.6 x 16 | 36 | 64 BW |
| 63 x 1.6 x 16 | 36 | 44 BW |
| 68 x 1.6 x 16 | 42 | 44 BW |
| 68 x 1.6 x 16 | 42 | 64 BW |
| 75 x 2 x 16 | 42 | 32 BW |

■ 3 - SAWs FOR SCREW INDUSTRY


of diameter 80 mm. 90 mm. 100 mm. in toothform A, B, AW, BW.

■ 4 - ISOCELES SAWs, PRISMATICS.

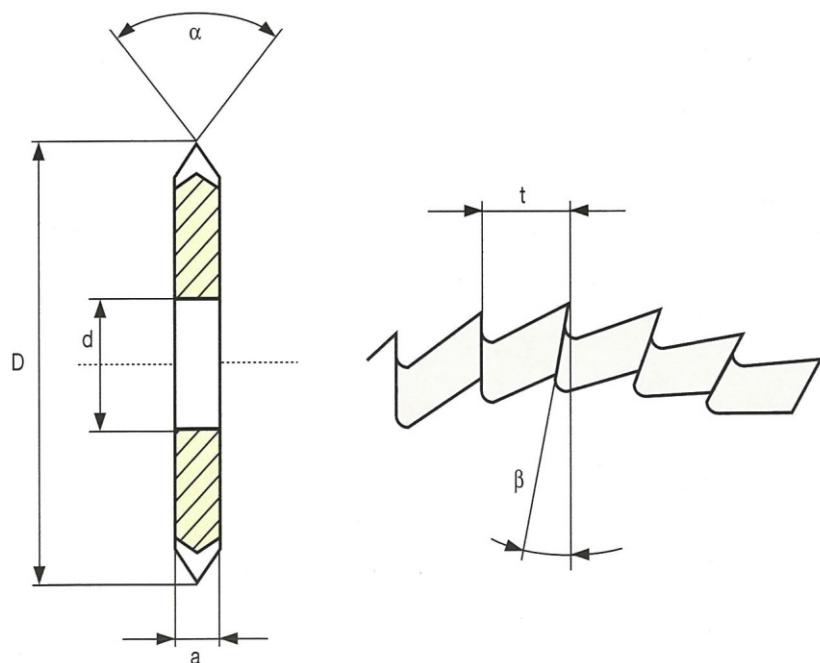

■ TABLE OF APPROX. CUTTING SPEED VALUES

| MATERIAL TO BE MECHANIZED | STEEL | | | STAINLESS | CAST IRON | COPPER | BRONZE BRASS | ALUMINIUM | | PLASTIC |
|-----------------------------|-----------------------------|-----------------------------|----------------------------------|-----------|------------|-------------|--------------|--------------|--------------|--------------|
| | up to 50 kg/mm ² | up to 80 kg/mm ² | more than 100 kg/mm ² | | | | | MASSIF | PROFILES | |
| Angle α | 8°-10° | 8° | 6°-8° | 6°-8° | 6° | 8°-10° | 6°-8° | 12° | 12° | 12° |
| Angle γ | 18°-20° | 15°-18° | 8°-15° | 15°-20° | 10°-12° | 15°-25° | 8°-15° | 25° | 20°-25° | 25° |
| Cutting speed(V) mts/minute | 25 50 | 15 30 | 10 20 | 7 15 | 15 20 | 60 200 | 100 400 | 400 800 | 800 2000 | 600 2000 |
| d ₁ mm. | $n = r.p.m.$ | | | | | | | | | |
| 32 | 250 500 | 150 300 | 100 200 | 70 150 | 150 250 | 600 2000 | 1000 3000 | 3000 | 3000 | 3000 |
| 40 | 200 400 | 120 240 | 80 160 | 55 110 | 110 200 | 480 1600 | 800 3000 | 3000 | 3000 | 3000 |
| 50 | 160 320 | 95 190 | 64 128 | 45 90 | 90 160 | 380 1270 | 640 2500 | 2500 3000 | 3000 | 3000 |
| 63 | 125 250 | 75 150 | 50 100 | 35 75 | 75 125 | 300 1000 | 500 2000 | 2000 3000 | 3000 | 3000 |
| 80 | 100 200 | 60 120 | 40 80 | 30 60 | 60 100 | 240 800 | 400 1600 | 1500 3000 | 2560 3000 | 2400 3000 |
| 100 | 80 160 | 47 95 | 32 64 | 22 48 | 48 80 | 190 640 | 320 1280 | 1280 2560 | 2560 3000 | 1900 3000 |
| 125 | 63 130 | 38 76 | 25 50 | 18 38 | 38 64 | 150 500 | 255 1000 | 1020 2040 | 2040 3000 | 1530 3000 |
| 160 | 50 100 | 30 60 | 20 40 | 14 30 | 30 50 | 240 800 | 200 800 | 800 1600 | 1600 3000 | 1200 3000 |
| 200 | 40 80 | 24 47 | 16 32 | 11 24 | 24 40, | 95 320 | 160 640 | 640 1280 | 1280 3000 | 960 3000 |
| 225 | 35 70 | 21 42 | 14 28 | 10 21 | 21 35 | 85 280 | 140 560 | 560 1140 | 1120 2840 | 850 2840 |
| 250 | 31 62 | 19 38 | 13 26 | 9 19 | 19 32 | 76 250 | 130 510 | 510 1020 | 1020 2550 | 760 2550 |
| 275 | 28 57 | 17 35 | 12 24 | 8 17 | 17 28 | 70 230 | 116 460 | 460 920 | 920 2300 | 700 2300 |
| 300 | 25 50 | 15 30 | 10 20 | 7 15 | 15 25 | 60 200 | 100 400 | 400 800 | 800 2000 | 600 2000 |
| 315 | 25 50 | 15 30 | 10 20 | 7 15 | 15 25 | 60 200 | 100 400 | 360 720 | 800 2000 | 600 2000 |
| 350 | 22 45 | 13 27 | 9 18 | 6 14 | 14 22 | 55 180 | 90 360 | 360 720 | 720 1800 | 550 1800 |
| 370 | 21 42 | 22 26 | 8 17 | 6 13 | 13 21 | 52 170 | 86 340 | 340 680 | 680 1720 | 520 1720 |
| 400 | 20 40 | 11 24 | 8 17 | 5 12 | 12 20 | 48 160 | 80 320 | 320 640 | 640 1600 | 480 1600 |

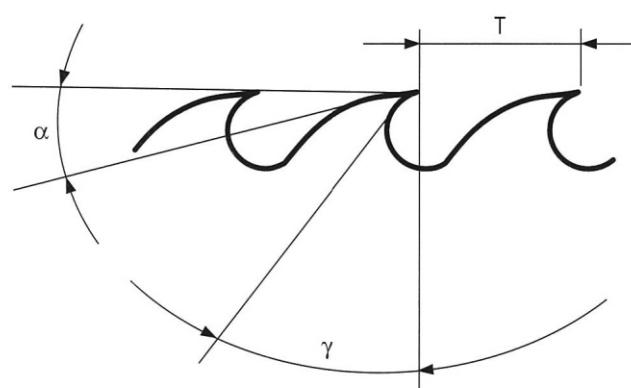

■ STANDARD PROGRAMME OF CUT OFF SAWS

| DIMENSIONS MM. | T = Pitch in mm. | | | | | | | Toothform and number | | | |
|--|------------------|-----------------|-----------------|-----------------|----------|----------|----------|----------------------|----------|----------|----------|
| | T 3 | T 4 | T 5 | T 6 | T 7 | T 8 | T 9 | T 10 | T 11 | T 12 | T 14 |
| 200 x 1,8 200 x 2 | 200 BW | 160 BW | 128 C | 100 C | | 80 C | | | | | |
| 225 x 2 225 x 2,5 | 220 BW | 180 BW | 140 C | 120 C | | 90 C | | | | | |
| 250 x 1,6 250 x 2 250 x 2,5 | 250 BW | 200 BW BR | 160 C BR | 128 C BR | | 100 C | | 80 C | | | |
| 275 x 1,6 275 x 2 275 x 2,5 | 280 BW | 220 BW BR | 180 C BR | 140 C | 120 C | 110 C | | 90 C | | | |
| 300 x 2 300 x 2,5 300 x 3 | 300 BW | 220 BW BR | 180 C BR | 160 C | 140 C | 120 C | | 90 C | | | |
| 315 x 2 315 x 2,5 315 x 3 | 320 BW | 240 BW BR | 200 C BR | 160 C | 140 C | 120 C | | 100 C | | 80 C | |
| 350 x 2,5 350 x 3 | 350 BW | 280 BW BR | 220 C BR | 180 C BR | 160 C | 140 C | 120 C | 110 C | | 90 C | 80 C |
| 370 x 3 | | 290 BW | 220 C | 200 C | 160 C | 140 C | 120 C | 110 C | 100 C | 90 C | 80 C |
| 400 x 3 400 x 3,5 | | 310 BW BR | 240 BW BR | 200 C | | 160 C | 140 C | 128 C | 110 C | 100 C | |
| 425 x 3 425 x 3,5 | | 320 BW BR | 260 BW BR | 220 BW BR | | 160 C | | | | 110 C | |
| 450 x 3,5 450 x 4 | | 340 BW BR | | 220 BW BR | | 180 C | | 140 C | | 120 C | 100 C |
| 500 x 4 | | | | 240 C BR | | 200 C | | 160 C | | | 110 C |

■ PINHOLES

Ø 32 = 2/8/45 + 4/11/63 ó 2/8/45 + 2/9/50 + 2/11/63

Ø 40 = 2/8/55 + 4/12/64

Ø 50 = 4/15/80 ó 4/15/80 + 4/14/85

RECOMMENDED PITCH ACCORDING TO MATERIAL AND SECTION TO BE CUT

| MATERIAL | | STEEL 50 kgs. | STEEL 50-80 kgs. | STEEL 80-100 kgs. | TEMPERED STEEL 100-130 kgs. | STAINLESS STEEL 90 kgs. | GREY CAST IRON | LIGHT ALUMINIUM 20-40 kgs. |
|------------------|----------|------------------|---------------------|----------------------|-----------------------------------|-------------------------------|-------------------|----------------------------------|
| CUTTING ANGLE | γ | 18° - 20° | 15° - 18° | 8° - 15° | 10° - 12° | 13° - 15° | 10° - 12° | 25° |
| | α | 8° - 10° | 8° | 6° - 8° | 6° | 6° - 8° | 6° | 12° |

| SECTION | S | | | | | | | | |
|---|---------|----|----|----|-----|-----|----|------|----|
| | t | 4 | 3 | 3 | 2,5 | 3 | 3 | 6 | |
|  | 10-20 | t | 4 | 3 | 3 | 2,5 | 3 | 3 | 6 |
| | Vcm/1' | 50 | 30 | 20 | 15 | 20 | 25 | 1200 | |
| | 20-35 | t | 8 | 5 | 5 | 3 | 4 | 4 | 8 |
| | Vcm/1' | 45 | 30 | 20 | 15 | 20 | 25 | 1000 | |
| | 35-55 | t | 10 | 8 | 6 | 4 | 6 | 6 | 12 |
| | Vcm/1' | 45 | 25 | 18 | 12 | 18 | 22 | 900 | |
| | 55-80 | t | 12 | 10 | 8 | 6 | 8 | 8 | 14 |
|  | Vcm/1' | 40 | 25 | 18 | 12 | 18 | 20 | 800 | |
| | 80-110 | t | 14 | 14 | 12 | 8 | 12 | 12 | 16 |
| | Vcm/1' | 40 | 20 | 15 | 10 | 15 | 20 | 700 | |
| | 110-130 | t | 16 | 16 | 14 | 10 | 14 | 14 | 18 |
| | Vcm/1' | 35 | 20 | 14 | 10 | 15 | 18 | 600 | |
| | 130-145 | t | 18 | 16 | 14 | 12 | 14 | 14 | 20 |
| | Vcm/1' | 30 | 15 | 12 | 8 | 12 | 16 | 500 | |

t = Pitch in mm.

Vcm/1' = Cutting speed in m/min.

■ TUBES AND PROFILES

| COPPER | BRONZE 40-60 kgs. | BRONZE 60-90 kgs. | BRASS ZINC | TITANIUM ALLOYS 30-80 kgs. |
|---------|----------------------|----------------------|---------------|----------------------------------|
| 18°-20° | 12°-15° | 10°-12° | 16° | 16°-18° |
| 8°-10° | 6°-8° | 6°-8° | 10° | 8°-10° |

| MATERIAL | CUTTING ANGLE | γ | 16°-18° | 16°-18° | 15° |
|----------|---------------|----------|---------|---------|-----|
| | α | | 6°-8° | 8°-10° | 8° |

| 6 | 5 | 4 | 5 | 4 |
|-----|-----|-----|-----|----|
| 400 | 400 | 120 | 600 | 50 |
| 8 | 7 | 6 | 6 | 4 |
| 350 | 400 | 110 | 600 | 45 |
| 11 | 10 | 8 | 10 | 6 |
| 300 | 350 | 100 | 550 | 45 |
| 14 | 12 | 10 | 12 | 10 |
| 250 | 300 | 90 | 550 | 45 |
| 16 | 14 | 12 | 16 | 12 |
| 200 | 250 | 80 | 500 | 40 |
| 18 | 16 | 14 | 18 | 14 |
| 150 | 200 | 60 | 500 | 34 |
| 20 | 18 | 16 | 18 | 16 |
| 120 | 150 | 50 | 450 | 30 |

| S | t | 4 | 3 | 2 |
|---------|--------|----|----|----|
| 10-20 | Vcm/1' | 10 | 20 | 35 |
| 20-35 | t | 5 | 4 | 3 |
| | Vcm/1' | 8 | 18 | 33 |
| 35-55 | t | 6 | 5 | 4 |
| | Vcm/1' | 8 | 18 | 30 |
| 55-80 | t | 8 | 6 | 5 |
| | Vcm/1' | 7 | 17 | 30 |
| 80-110 | t | 8 | 6 | 5 |
| | Vcm/1' | 6 | 16 | 28 |
| 110-130 | t | 10 | 8 | 6 |
| | Vcm/1' | 6 | 16 | 26 |
| 130-145 | t | 12 | 10 | 8 |
| | Vcm/1' | 6 | 15 | 24 |


Calculation coefficient S

$$S = \frac{\text{Wall thickness}}{\text{Tube diameter}}$$

■ TECHNICAL DATA

■ SIDE CLEARANCE (S)

| DIAMETER THICKNESS | 80 | 100 | 125 | 160 | 200 | 225 | 250 | 275 | 315 | 350 | 370 | 400 | 450 |
|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0,3 | 0,03 | 0,03 | 0,03 | | | | | | | | | | |
| 0,4 | 0,05 | 0,05 | 0,05 | | | | | | | | | | |
| 0,5 | 0,10 | 0,10 | 0,10 | | | | | | | | | | |
| 0,6 | 0,10 | 0,15 | 0,15 | | | | | | | | | | |
| 0,8 | 0,15 | 0,20 | 0,20 | 0,15 | | | | | | | | | |
| 1 | 0,20 | 0,20 | 0,20 | 0,20 | 0,20 | | | | | | | | |
| 1,2 | 0,25 | 0,25 | 0,25 | 0,30 | 0,30 | 0,30 | | | | | | | |
| 1,6 | 0,25 | 0,25 | 0,25 | 0,35 | 0,35 | 0,40 | 0,40 | 0,35 | 0,37 | | | | |
| 2 | 0,30 | 0,30 | 0,30 | 0,40 | 0,40 | 0,45 | 0,45 | 0,50 | 0,50 | | | | |
| 2,5 | 0,35 | 0,35 | 0,35 | 0,50 | 0,50 | 0,50 | 0,50 | 0,60 | 0,60 | 0,62 | 0,62 | 0,65 | 0,75 |
| 3 | 0,40 | 0,40 | 0,45 | 0,50 | 0,50 | 0,55 | 0,55 | 0,65 | 0,65 | 0,68 | 0,68 | 0,75 | 0,80 |
| 3,5 | 0,45 | 0,50 | 0,50 | 0,60 | 0,60 | 0,60 | 0,60 | 0,65 | 0,65 | 0,70 | 0,75 | 0,80 | 0,85 |
| 4 | 0,45 | 0,50 | 0,50 | 0,60 | 0,60 | 0,60 | 0,60 | 0,65 | 0,65 | 0,70 | 0,75 | 0,85 | 0,85 |
| 5 | 0,50 | 0,60 | 0,60 | 0,60 | 0,60 | 0,65 | 0,65 | - | - | - | - | - | |
| 6 | 0,55 | 0,60 | 0,60 | 0,60 | 0,60 | 0,65 | 0,65 | - | - | - | - | - | |

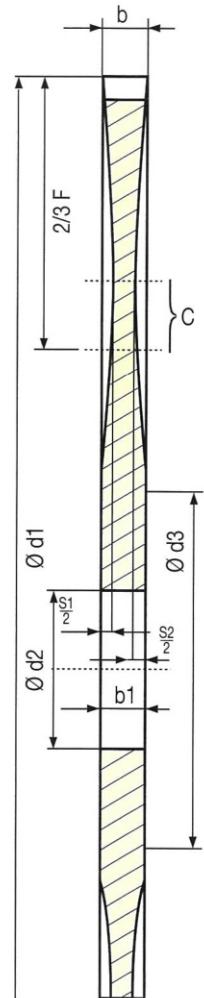


S = Side clearance total b = Saw thickness

C = Maximum clearance b₁ = Hub thickness

■ RUN OUT

| DIAMETER | STANDARD | SPECIAL | SUPER |
|-----------|-----------|---------|-------|
| 200 - 300 | 0,20/0,23 | 0,15 | 0,10 |
| 315 - 370 | 0,25 | 0,15 | 0,12 |
| 400 - 500 | 0,30 | 0,17 | 0,12 |

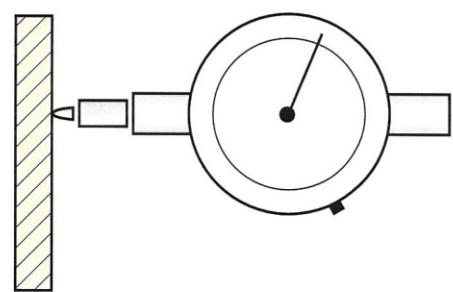

CUTTING SPEED AND FEED

The cutting speed is the peripheric speed of one point that describes a circumference of diameter **D**.

It is the speed the tooth is moving at touching the working piece.

Formula to determine the speed:

$$V_c = \frac{D \cdot \pi \cdot N}{1000}$$

D = saw diameter.
π = 3,14.
N = revolutions of machine.

It is always determined in meter/minute.

Do never confound with the revolutions of the machine.

One of the principal rules is to reduce speed for hard materials and to increase speed for soft materials.

The formula of **FEED** is:

$$S = S_z \cdot Z \cdot n$$

S = advance in mm./minute.
Sz = advance per tooth.
Z = teeth number of saw.
n = number of turns minute.

| MATERIAL | CUTTING SPEED | ADVANCE PER TOOTH |
|------------------------------------|---------------|-------------------|
| Steel up to 50 kg/mm ² | 30 ÷ 50 | 0,02 ÷ 0,04 |
| Steel up to 90 kg/mm ² | 20 ÷ 40 | 0,02 ÷ 0,03 |
| Steel up to 120 kg/mm ² | 15 ÷ 25 | 0,01 ÷ 0,02 |
| Grey steel | 30 ÷ 50 | 0,03 ÷ 0,04 |
| Bronze and copper | 200 ÷ 300 | 0,03 ÷ 0,05 |
| Stainless steel | 10 ÷ 20 | 0,01 ÷ 0,02 |
| aluminium profile | 1000 ÷ 1500 | 0,05 ÷ 0,07 |
| Brass | 400 ÷ 600 | 0,03 ÷ 0,05 |
| Synthetic | 100 ÷ 150 | 0,05 ÷ 0,07 |

**CUT OFF MACHINES AND
THEIR DRIVING HOLES**


| MACHINE | DIAMETER | HOLE | PINHOLES | MACHINE | DIAMETER | HOLE | PINHOLES |
|----------------|-----------|------|-------------------------|----------------|-----------|------------------|------------------|
| ADIGE | 200 - 250 | 32 | 4/9/50 | KINSTONE | 200 - 250 | 32 | Universales |
| | 275 - 315 | 32 | 2/11/63 | MACC | 225 - 350 | 32 | 2/8/45 + 2/11/63 |
| | 350 | 40 | 4/12/64 | MACO | 425 | 50 | 4/15/80 |
| | 400 - 425 | 50 | 4/15/80 | MAIR | 300 - 350 | 32 | 2/8/45 + 2/11/63 |
| BAIER | 175 - 250 | 32 | Ranuras Chavettes | 300 - 350 | 40 | 2/8/55 + 4/12/64 | |
| BARSON | 210 | 32 | 2/8/45 | MEP | 225 - 350 | 32 | 2/8/45 + 2/11/63 |
| | 275 | 40 | 2/8/55 + 4/12/64 | METORA | 250 - 350 | 32 | Universales |
| BEWO | 250 - 300 | 32 | 2/8/45 | OMES | 250 - 300 | 32 | 2/8/45 + 2/11/63 |
| | 315 - 350 | 40 | 2/8/55 + 4/11/63 | O.M.P. | 250 - 370 | 32 | 2/8/45 + 2/11/63 |
| BIMAX | 175 | 32 | 2/8/45 | 400 - 500 | 50 | 4/15/80 | |
| | 250 - 300 | 32 | 2/8/45 + 2/11/63 | R.G.A. | 275 - 350 | 40 | 2/8/55 + 2/11/63 |
| BROBO WALDOWN | 250 | 32 | 2/11/63 | ROBEJO | 250 - 350 | 32 | 2/8/45 + 2/11/63 |
| | 300 | 38 | 2/9/55 | ROHBI SCOTHMAN | 175 - 250 | 32 | 2/8/45 |
| | 300 - 400 | 40 | 2/8/55 + 4/12/64 | 250 - 300 | 32 | 2/8/45 + 2/11/63 | |
| | 500 | 40 | 4/12/64 + 2/12/80 | 275 - 350 | 40 | 2/8/55 + 4/12/64 | |
| CONNİ | 250 - 300 | 40 | 2/8/55 + 4/11/63 | SIMEC | 250 - 350 | 32 | 4/11/63 |
| | 400 - 425 | 40 | 4/11/63 | SINICO | 350 | 32 | 2/8/45 + 2/11/63 |
| | 400 - 450 | 50 | 4/15/80 | SOCO | 250 - 350 | 32 | 2/11/63 |
| DEMURGER | 160 - 300 | 25.4 | - | STARTRITE | 250 | 32 | 2/9/56 |
| | 200 - 250 | 32 | 2/8/45 + 2/11/63 | 300 - 315 | 32 | 2/11/80 | |
| | 225 - 300 | 40 | 2/8/55 + 4/12/64 | STAYER | 225 | 32 | - |
| DORINGER | 315 - 350 | 40 | 4/12/64 | THOMAS | 225 - 350 | 32 | 2/8/45 + 2/11/63 |
| EISELE | 110 | 22 | - | TRENNJAEGER | 250 - 275 | 40 | 4/11/63 |
| | 210 - 225 | 40 | 2/8/55 | 315 - 400 | 50 | 4/14/85 | |
| | 250 - 350 | 40 | 2/8/55 + 4/12/64 | ULMIRA | 160 - 250 | 32 | - |
| | 400 - 450 | 40 | 2/12/64 + 2/15/80 | 250 - 400 | 40 | 4/11/63 | |
| | 500 | 40 | 2/15/80 + 2/15/100 | VIEMME | 250 - 350 | 32 | 2/8/45 + 2/11/63 |
| FABRIS | 225 - 350 | 32 | 2/8/45 + 2/11/63 | WAGNER | 210 - 315 | 32 | 4/9/50 |
| FEMI | 225 - 315 | 32 | 2/8/45 + 2/11/63 | 350 | 50 | 4/14/80 | |
| FONG-HO | 250 - 275 | 32 | 2/8/45 + 2/9/50 2/11/63 | WAHLEN | 250 - 400 | 40 | 2/8/55 + 2/11/63 |
| | 300 - 400 | 32 | 4/11/63 | WEIDMANN | 210 - 275 | 32 | 2/8/45 |
| | 360 | 40 | 2/11/63 + 2/11/65 | WINTER | 250 - 325 | 40 | 2/8/55 + 4/11/63 |
| HÄBERLE | 225 - 315 | 40 | 2/8/55 + 4/12/64 | WUNSCH | 210 - 250 | 32 | 2/8/45 |
| IBP PEDRAZZOLI | 200 - 350 | 32 | 2/8/45 + 4/11/63 | 210 - 275 | 40 | 2/8/55 | |
| | 425 | 50 | 4/15/90 | 300 - 400 | 40 | 2/8/55 + 4/12/64 | |
| KALTEN BACH | 225 - 250 | 32 | - | | | | |
| | 350 - 370 | 50 | 4/15/80 | | | | |
| KASTO | 315 - 350 | 40 | 4/11/63 | | | | |
| | 400 - 450 | 50 | 4/15/80 | | | | |

CIRCULAR KNIVES

We manufacture circular knives of high speed steel **HSS - DMo5 y HSSE/EMo5 Co5**, from Ø 20 up to Ø 500 MM. With one or two bevels to cut: paper, caron, rubber and textiles.

For carton tube cutting we recommend the toothed circular knife according to graphic 2 with 1 or 2 bevel.


GRAPHIC 1

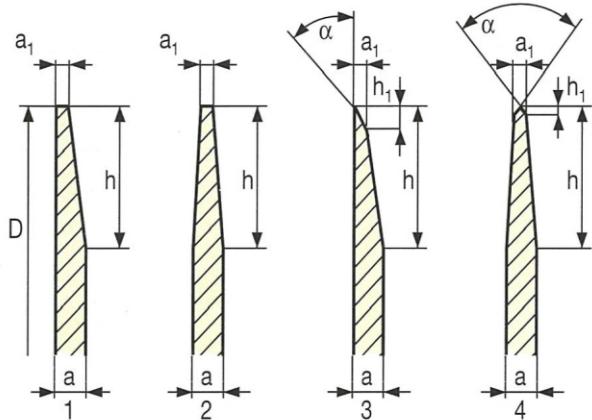


To cut spongy materials, tissues, polycarbonates the adequate would be 1 bevel and evacuation / coolant slots according to graphic 3.

For meat, fish and frozen industry, although high speed steel is used as well, we recommend to use stainless steel because of hygienic standards.

GRAPHIC 2

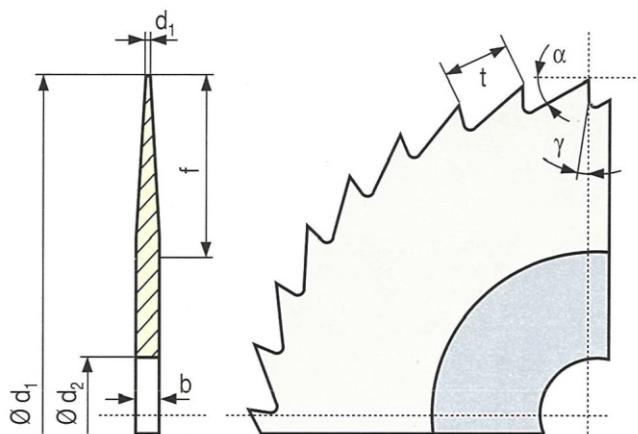

GRAPHIC 3

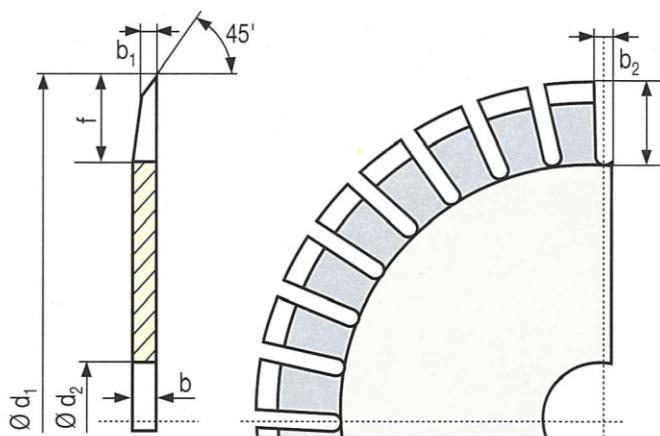

SURFACE TREATMENTS


■ ANTIFRIC

This is the most common surface treatment.

It consists of a black-blue Fe_3O_4 coating, hard and adhesive, with elevated resistance against oxidation, corrosion and wear down.

The so treated surface disposes of sufficient microporosity as to retain the cutting oil, obtaining this way the autolubrication and consequently the evacuation of the produced cutting heat.

Improves the friction coefficient and evacuation of welded chips in cutting edge and sawblade sides.

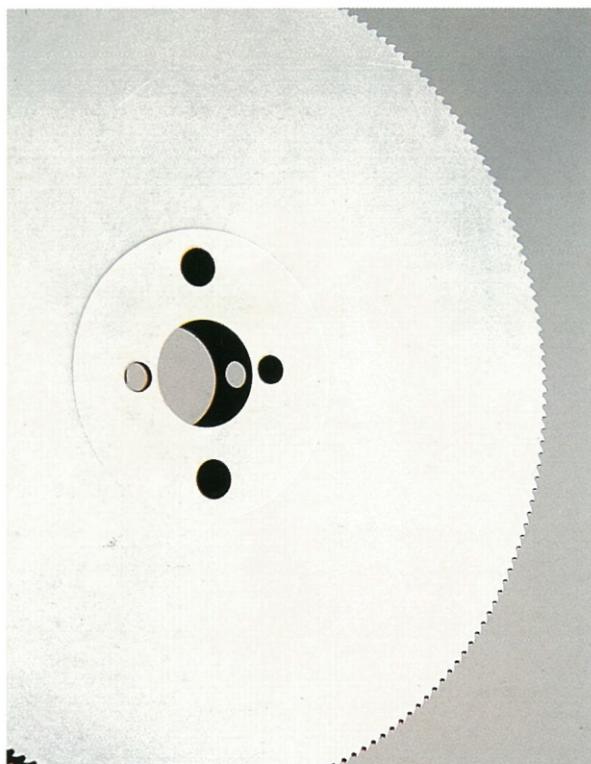

■ NITROVAP

This version has been studied especially for the mechanizing of hard and abrasive materials: stainless steels, aluminum, etc.

It is a carbon sulfo nitriding + steam oxid which obtains an elevated surface hardness without producing fragility and at the same time an autolubrication effect because of the sulfo coating.

PVD COATING

TIN

Titanium nitride coating is the most popular coating made by PVD (physical vapor deposition) with the following characteristics:

- **Microhardness:** 2300 - 2500 (HV 0,05)
- **Coating thickness (μ):** 1 - 3
- **Colour:** GOLDEN - YELLOW
- **Friction Coefficient:** 0,65
- **Degradation Temperature:** 500°

It allows up to 25% increase in cutting speeds and has a greater resistance to wear.

EXTREME

The PVD coating of titanium aluminium nitride combines the increased toughness of a multilayer structure with a raised hardness and a high thermic and chemical stability of the aluminium and titanium nitride layers.

EXTREME is an extra-tough treatment that allows higher machining rates with a minimum of cutting lubricant and in some instances, dry cutting.

- **Microhardness:** 3500 (HV 0,05)
- **Coating thickness (μ):** 2 - 5
- **Colour:** BLUE -GREY
- **Friction Coefficient:** 0,40
- **Degradation Temperature:** 800°

Thanks to the most modern machinery and the high standards through all the stages of manufacturing along with the latest CNC saw sharpening technology, we are able to offer products of consistent quality and performance.





TICN

PVD coating is a titanium carbonitride with the following characteristics:

- **Microhardness:** 3000 (HV 0,05)
- **Coating thickness (μ):** 1 - 4
- **Colour:** PURPLE - GREY
- **Friction Coefficient:** 0,50
- **Degradation Temperature:** 450°

The main advantages in this type of coating are the increase in surface hardness and a much higher resistance to abrasion in comparison to TIN.

HARDNESS SCALE

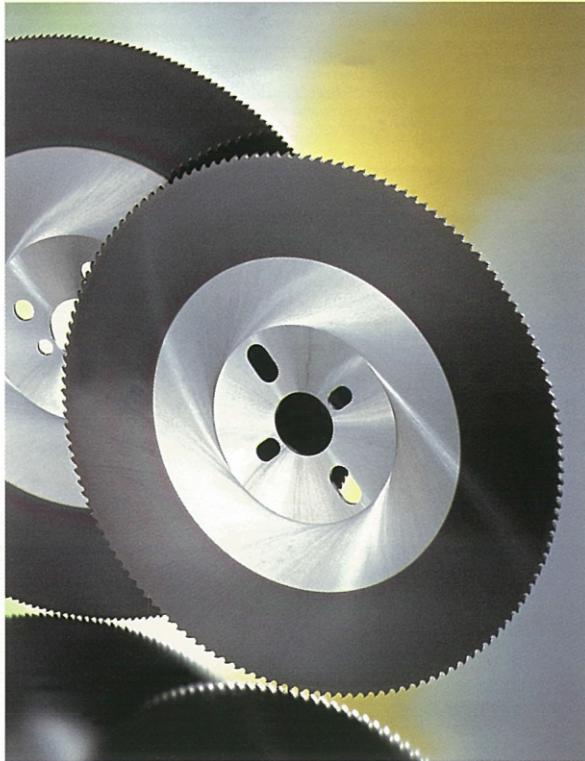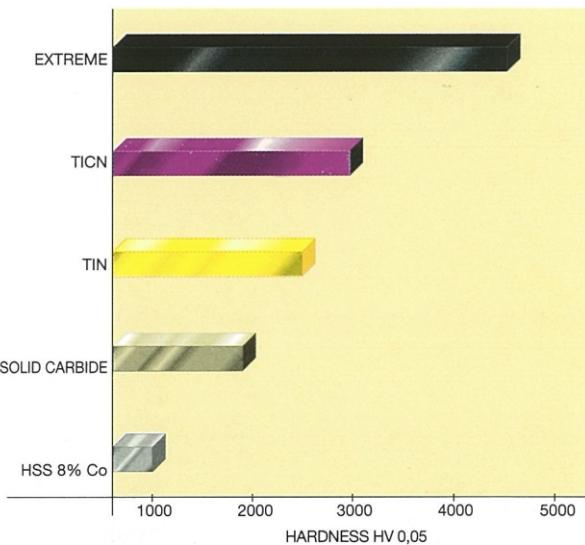

■ NET WEIGHT OF HSS/HSS-E SAWBLADES

| Ø mm. | 20 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 |
|-----------|-----------------------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
| HOLE | 5 | 8 | 10 | 13 | 16 | 22 | 22 | 22 | 32 | 32 | 32 | 40 |
| THICKNESS | Weight in kg. 1 piece | | | | | | | | | | | |
| 0,2 | 0.0005 | 0.0009 | 0.0016 | 0.0026 | 0.0042 | | | | | | | |
| 0,3 | 0.0007 | 0.0013 | 0.0024 | 0.0039 | 0.0063 | 0.011 | 0.015 | | | | | |
| 0,4 | 0.0009 | 0.0018 | 0.0032 | 0.0052 | 0.0084 | 0.014 | 0.022 | 0.034 | | | | |
| 0,5 | 0.0011 | 0.0022 | 0.0040 | 0.0065 | 0.011 | 0.018 | 0.027 | 0.042 | | | | |
| 0,6 | 0.0013 | 0.0026 | 0.0048 | 0.008 | 0.013 | 0.021 | 0.032 | 0.050 | | | | |
| 0,8 | 0.0018 | 0.0035 | 0.0064 | 0.010 | 0.017 | 0.028 | 0.043 | 0.067 | 0.113 | 0.178 | | |
| 1,0 | 0.0022 | 0.0044 | 0.008 | 0.013 | 0.021 | 0.035 | 0.054 | 0.084 | 0.141 | 0.223 | | |
| 1,2 | 0.0026 | 0.0053 | 0.010 | 0.016 | 0.025 | 0.042 | 0.065 | 0.101 | 0.169 | 0.268 | | |
| 1,6 | 0.0035 | 0.007 | 0.013 | 0.018 | 0.034 | 0.056 | 0.086 | 0.134 | 0.226 | 0.401 | 0.560 | |
| 2,0 | 0.0044 | 0.009 | 0.016 | 0.026 | 0.042 | 0.070 | 0.108 | 0.168 | 0.282 | 0.446 | 0.700 | |
| 2,5 | 0.0055 | 0.011 | 0.020 | 0.033 | 0.053 | 0.088 | 0.135 | 0.210 | 0.353 | 0.560 | 0.880 | 1.400 |
| 3,0 | 0.0066 | 0.013 | 0.024 | 0.039 | 0.063 | 0.105 | 0.162 | 0.252 | 0.423 | 0.670 | 1.050 | 1.680 |
| 3,5 | 0.0077 | 0.015 | 0.028 | 0.046 | 0.074 | 0.123 | 0.189 | 0.294 | 0.494 | 0.780 | 1.130 | 1.960 |
| 4,0 | 0.009 | 0.018 | 0.032 | 0.052 | 0.084 | 0.140 | 0.216 | 0.336 | 0.564 | 0.890 | 1.400 | 2.240 |
| 5,0 | 0.011 | 0.022 | 0.040 | 0.065 | 0.105 | 0.175 | 0.270 | 0.420 | 0.705 | 1.120 | 1.750 | 2.800 |
| 6,0 | 0.013 | 0.026 | 0.048 | 0.078 | 0.126 | 0.210 | 0.324 | 0.504 | 0.846 | 1.340 | 2.100 | 3.360 |


| | | | | | | | |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 175 x 2,0 | 0,340 kg. | 225 x 2,0 | 0,540 kg. | 300 x 2,5 | 1,230 kg. | 400 x 3,0 | 2,520 kg. |
| 200 x 2,0 | 0,440 kg. | 250 x 1,6 | 0,530 kg. | 315 x 2,5 | 1,400 kg. | 400 x 3,5 | 3,200 kg. |
| 210 x 1,6 | 0,390 kg. | 250 x 2,0 | 0,700 kg. | 315 x 3,0 | 1,690 kg. | 425 x 3,5 | 3,610 kg. |
| 210 x 2,0 | 0,490 kg. | 250 x 2,5 | 0,880 kg. | 350 x 2,5 | 1,710 kg. | 450 x 4,0 | 4,630 kg. |
| 220 x 2,0 | 0,510 kg. | 275 x 2,0 | 0,830 kg. | 350 x 3,0 | 2,060 kg. | 500 x 3,0 | 4,280 kg. |
| 225 x 1,6 | 0,430 kg. | 275 x 2,5 | 1,040 kg. | 370 x 3,0 | 2,300 kg. | 500 x 4,0 | 5,710 kg. |

SOLID CARBIDE SAWBLADES



■ SIMILAR DIN 1837

| DIAMETER | 15 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
|-----------|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| HOLE | 5 | 5 | 8 | 8 | 10 | 13 | 16 | 22 | 22 | 22 | 32 |
| THICKNESS | Z | Z | Z | Z | Z | Z | Z | Z | Z | Z | Z |
| 0,2 | 64 | 80 | 80 | 100 | 128 | 128 | | | | | |
| 0,25 | 64 | 80 | 80 | 80 | 100 | 128 | | | | | |
| 0,3 | 64 | 64 | 64 | 80 | 100 | 128 | 128 | | | | |
| 0,4 | 64 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | | | |
| 0,5 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 | | |
| 0,6 | 48 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | | |
| 0,8 | 40 | 40 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 | |
| 1 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | 160 |
| 1,2 | 40 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 |
| 1,5 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 |
| 1,6 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 |
| 1,8 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 160 |
| 2 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 160 |
| 2,5 | 40 | 32 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 |
| 3 | 40 | 32 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 |

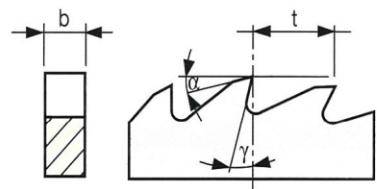


80x0,22 Z-64



50x0,22 Z-80


■ SIMILAR DIN 1838

| DIAMETER | 40 | 50 | 63 | 80 | 100 | 125 |
|-----------|----|----|----|----|-----|-----|
| HOLE | 10 | 13 | 16 | 22 | 22 | 22 |
| THICKNESS | Z | Z | Z | Z | Z | Z |
| 0,25 | 40 | | | | | |
| 0,3 | 40 | | | | | |
| 0,4 | 40 | 48 | 64 | | | |
| 0,5 | 40 | 48 | 64 | | | |
| 0,6 | 40 | 40 | 48 | 64 | 80 | |
| 0,8 | 32 | 40 | 48 | 64 | 64 | 80 |
| 1 | 32 | 40 | 48 | 48 | 64 | 64 |
| 1,2 | 32 | 40 | 40 | 48 | 64 | 64 |
| 1,5 | 32 | 32 | 40 | 48 | 48 | 64 |
| 1,6 | 32 | 32 | 40 | 48 | 48 | 64 |
| 1,8 | 32 | 32 | 40 | 40 | 48 | 64 |
| 2 | 32 | 32 | 40 | 40 | 48 | 64 |
| 2,5 | 32 | 32 | 32 | 40 | 48 | 48 |
| 3 | 32 | 24 | 32 | 40 | 40 | 48 |

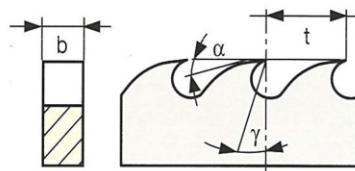

■ SIMILAR DIN 1837 EXTRAFINE

| DIAMETER | 15 | 20 | 25 | 32 | 40 | 50 | 63 |
|-----------|----|----|----|-----|----|-----|-----|
| HOLE | 50 | 5 | 8 | 8 | 10 | 13 | 16 |
| THICKNESS | Z | Z | Z | Z | Z | Z | Z |
| 0,2 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,25 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,3 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,4 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,5 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,6 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 0,8 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 1 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 1,2 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 1,5 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |
| 2 | 80 | 80 | 80 | 100 | 80 | 100 | 100 |

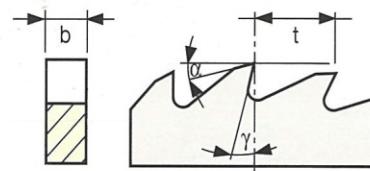



**C/MALVASIA 24-30
08758 CERVELLO
(BARCELONA)
www.glgaws.com**